# TAHIT J-3X 60" X 42" X 23" END DRAIN





**RECTANGLE** • 1 PERSON

# **OPERATING GALLONS**

REGULAR USAGE - 45 GAL. UPPER BODY USAGE - 85GAL.

# **FEATURES**

#### **GENERAL**

- High-gloss, high-impact, UV-resistant acrylic will not dull or fade
- Suitable for drop-in application
- Slip resistant bottom

#### **SYSTEM**

- 7 flow-adjustable and directional jets, including:
  - 3-pack rotating back jets
  - 2 side jets
  - 2 foot jets
- 2 B.H.P pump 9 Amps
- Tri-ssage control for adjustable pump flow rates
- Passive warm air induction system
- Rotating back jets are adjustable to stationary jets
- Upper body jets can be shut down for operation at a lower water level

## COMFORT

- Armrests
- Totally insulated with eco-friendly polyurethane foam for a warmer bathing experience

#### **CLEANLINESS**

- Acrylic is easy to clean with standard non-abrasive household cleaning products
- · Plumbed with anti-microbial flex piping
- Arched plumbing provides gravity flow draining for sanitary bathing

# **OPTIONS AVAILABLE**

- Mood or LED lights
- Bath waste & overflows
- Spa Pillows
- Neck jet therapy system
- Aromatherapy
- 6" acrylic grab bars
- Inline heater
- Upgrade pump size
- Extra jets/specialty jet upgrade
- Removable skirt
- ABS tile flange

# **TRIM KIT FINISHES**

- Polished chrome
- Satin nickel
- Oil rubbed bronze
- Polished brass

# **COLORS AVAILABLE**

# Standard Colors

White, Biscuit

## **DECORATOR COLORS**

Bone, Black, Ice Grey

### WARRANTY


10-year limited factory warranty



Jetta guarantees that
the water in our
insulated whirlpool
baths will stay within
2 degrees of its original
fill temperature for
30 minutes of use
without an inline heater.



# JETTA WHIRL HYDROTHERAPY | 60" X 42" X 23" | END DRAIN

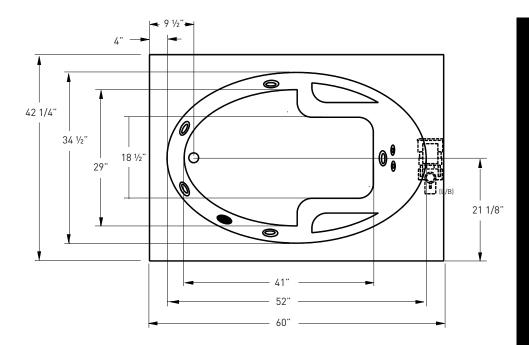

### **ELECTRICAL SPECIFICATIONS**

Required Electrical Service 110/115 Volts Standard Whirlpool 20 amp GFI Each pump must be protected by a dedicated GFI breaker (refer to local codes).

#### **CODES/STANDARDS APPLICABLE**

Specific model meets or exceeds the requirements for the following standards: ANSI, ASME

#### SUGGESTED PUMP ACCESS PANEL


Suggested access size 20" x 12" Actual size may vary depending on distance of access to pump location.

# **DROP-IN CUT OUT DIMENSIONS**

Subtract 1" from length and width dimensions Actual cut out dimension 59"x 41"

SHIPPING WEIGHT 184 lbs

\*L/B pump position is standard.
Custom pump locations available upon request.

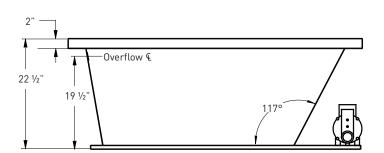

# INSTALLATION: MEASURE TUB BEFORE BUILDING TUB DECK.

For best results, Jetta Corporation recommends 1"-3" of mortar bedding under the tub base for maximum support. Drawing shows manufacturer's standard pump location(s). Contact Jetta for details. Dimensional variance on drawings may be +/- 1/2 inch and are subject to change without notice.





© 2017 Jetta Corporation. All rights reserved. Specifications are subject to change without notice REV 07/2017